IFW



Donald R. Patterson 21615 Park Wind Ct. Katy, TX. 77450

June 27, 2006

Commissioner for Patents P O Box 1450 Alexandria, Va.

RE: Application No. 107640,146.

To Whom It May Concern,

I am writing to you today, after speaking with Greg Wilson. I have called upon several occasions regarding the progress of the above mentioned patent application, and was informed that your office was extremely backlogged, that I would hear something shortly. After speaking with Mr. Wilson, it appears that my paperwork has been yet again been misplaced.

Enclosed, please find:

Your form PO-90C, with mailing date circled.
Copies [front and back] of certified mail receipt
USPS Track and Confirm with date and name of the person who signed for it.

Copy of original paperwork [37 CFR 1.21 and response]

Thank you for you time and attention in this matter.

I am eagerly awaiting your reply.

Donald R. Patterson

**Yours Truly** 

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office Address: COMMISSIONER FOR PATENTS P.O. Box 1450 Alexandria, Virginia 22313-1450 www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/764,146	10/764,146 01/15/2004 Donald Royce Patterson		8143	
Donald R. Patterson 21615 Park Wind Ct			EXAMINER	
			WILSON, GREGORY A	
Katy, TX 774			ART UNIT	PAPER NUMBER
			3749	

DATE MAILED: 10/28/2005

Please find below and/or attached an Office communication concerning this application or proceeding.

Uniti	ED STATES POSTAL SERVICE		First-Class Mail
•	The same of the sa	The state of the s	Postage & Fees Paid USPS Permit No. G-10
	• Sender: Please print your na	ame, address, and ZIP	7+4 in this box •
	DONALD P	the state of the s	
	21615 PAR	k wind c	T
	KATY TX	77450	

thinthin later later later and the later l



•	·		
	production and production of the second seco		
SENDER: COMPLETE THIS SECTION	COMPLETE THIS SECTION ON DELIV	ERY	
<ul> <li>Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.</li> <li>Print your name and address on the reverse so that we can return the card to you.</li> <li>Attach this card to the back of the mailpiece,</li> </ul>	A. Signature  X  B. Received by ( Printed Name)	☐ Agent☐ Addressed C. Date of Deliver	
or on the front if space permits.  1. Article Addressed to:  Commissioner For Patents  P.O 1304 1450	D. Is delivery address different from item 1? Yes If YES, enter delivery address below: No		
Alex Andria VA. 22313-1450	3. Service Type Certified Mail	ot for Merchandise	
	4. Restricted Delivery? (Extra Fee)	☐ Yes	
2. Article Number 7005 18	50 0009 37êî 292 <u>1</u>		
PS Form 3811, February 2004 Domestic Re	turn Receipt	102595-02-M-154	



Home | Help

**Track & Confirm** 

# **Track & Confirm**

## **Search Results**

Label/Receipt Number: 7005 1820 0008 3161 5951 Status: Delivered

Your item was delivered at 8:08 am on November 28, 2005 in ALEXANDRIA, VA 22313. The item was signed for by WMCDOUGAL. A proof of delivery record may be available through your local Post Office for a fee.

Additional information for this item is stored in files offline.

Restore Offline Details >) (?)

(Return to USPS.com Home >

Track & Confirm

Enter Label/Receipt Number.

POSTAL INSPECTORS
Preserving the Trust

site map contact us government services jobs National & Premier Accounts Copyright © 1999-2004 USPS. All Rights Reserved. Terms of Use Privacy Policy



. !	OIPE			
<del>~ 2 2 "</del>	JUL 1 2 2006 0	Application No.	Applicant(s)	
,	Notice Non-Compliant	10/764,146		
A	Amendment (37, GFR 1.121)	Examiner	Art Unit	
•		4	ill the second and a second	alaba a a
The ame	The MAILING DATE of this communication app endment document filed on <u>03/21/05</u> is consider R 1.121 or 1.4. In order for the amendment doc	ed non-compliant becaus	se it has failed to meet the	e requirements
	LLOWING MARKED (X) ITEM(S) CAUSE THE  1. Amendments to the specification:  A. Amended paragraph(s) do not include  B. New paragraph(s) should not be unde  C. Other	markings.	ENT TO BE NON-COMPL	LIANT:
	A. Not presented on a separate sheet. 37     B. Other	7 CFR 1.72.		
<ul> <li>3. Amendments to the drawings:         <ul> <li>A. The drawings are not properly identified in the top margin as "Replacement Sheet," "New Sheet," or "Annotated Sheet" as required by 37 CFR 1.121(d).</li> <li>B. The practice of submitting proposed drawing correction has been eliminated. Replacement drawings showing amended figures, without markings, in compliance with 37 CFR 1.84 are required.</li> <li>C. Other _EACH SHEET OF DRWGS. SHOULD HAVE THE NUMBER OF SHEETS AT THE TOP OF PAGE.</li> </ul> </li> </ul>				
_	4. Amendments to the claims:  A. A complete listing of all of the claims is  B. The listing of claims does not include to C. Each claim has not been provided with of each claim cannot be identified. No number by using one of the following: (Previously presented), (New), (Not expected) D. The claims of this amendment paper to E. Other: CLAIMS MUST START ON A SEE	the text of all pending clain the proper status identifute: the status of every c status identifiers: (Origina ntered), (Withdrawn) and nave not been presented	fier, and as such, the indicaled af laim must be indicated af al), (Currently amended), (Withdrawn-currently am in ascending numerical c	vidual status ter its claim (Canceled), ended). order.
	5. The amendment is unsigned or not signed in	accordance with 37 CFF	R 1.4.	
	er explanation of the amendment format require w.uspto.gov/web/offices/pac/dapp/opla/preogno		MPEP § 714 and the US	PTO website at
TIME PE	RIODS FOR FILING A REPLY TO THIS NOTIC	CE:		
filed	cant is given <b>no new time period</b> if the non-co after allowance. If applicant wishes to resubmit e corrected amendment must be resubmitted	t the non-compliant after-	final amendment with cor	rections, the
corre amer reque	cant is given <b>one month</b> , or thirty (30) days, where the section of the non-compliant amendment and the following: a preliminary are est for continued examination (RCE) under 37 dunder 37 CFR 1.103(a) or (c), and an amend	t in compliance with 37 C nendment, a non-final am CFR 1.114), a supplemen	FR 1.121 or 1.4, if the no endment (including a sub stal amendment filed with	on-compliant omission for a
an	Attensions of time are available under 37 CFR nendment or an amendment filed in response to allure to timely respond to this notice will resund abandonment of the application if the non-confiled in response to a Quayle action; or Non-entry of the amendment if the non-complete amendment of the a	o a <i>Quayle</i> action. It in: mpliant amendment is a	non-final amendment or a	an amendment upplemental
	Legal Instruments Examiner (LIE)		571-272-4 Telephone No.	1312
	Legal instruments Examiner (LIE)		reiephone ivo.	



## APPARATUS FOR HEATING PLASTIC PIPE

## ABSTRACT OF THE DISCLOSURE

An apparatus is provided for heating thermoplastic pipe in the field, including a container for receiving the pipe and a conduit communicating with the container for routing hot exhaust gases from an internal combustion engine into the container to heat the pipe for bending. Interchangeable templates to facilitate the bending of large and small schedule pipe. A diffuser is provided in the container to disperse the hot gases evenly around the pipe to promote uniform bending of same. Apparatus is insulated enabling faster bending and the ability to handle the apparatus during use.

# REFERENCES CITED

3,965,715	06/29/1976	Parmann	72/342.1; 72/369
2,571,416	10/16/1951	Brown	65/281
2,480,774	08/30/1949	Rossheim, et al	72/128; 65/271
			72/369; 264/339
6,033,213 A	03/072003	Halverson, Jr.	432/225
6,257,880 B1	07/10/2001	Hirayama	432/225
6,561,797 B1	05/13/2003	Johnson	432/225
5,853,289 A	12/29/1998	Temple	432/225

#### **CLAIMS**

#### WHAT IS CLAIMED

(Currently Amended) 1. An apparatus for heating plastic pipe comprised of;

- An inner housing having at least one first opening and a second opening therein for receiving pipe to be heated,
- an outer housing having at least one first opening and a second opening therein for receiving pipe to be heated,
- c. a layer of insulation between the two housings, creating an oven effect and allowing the retention of heat, while allowing the outside of the box to be handled immediately after, and during use.
- d. a conduit having a first end communicating with the second opening in the container and a second end adapted to be attached to the source of hot exhaust gases to route said gases into the container to heat the pipe whereby it may be bent,
- e. interchangeable multi-sized templates on both to be inserted between inner and outer housings of apparatus, maximizing heat retention, while still allowing the apparatus adequate ventilation and constant circulation of gases.

(Currently Amended) 2. The apparatus as set forth in claim 1 including a permanent attached diffuser that:

- a. Is mounted to the inner housing adjacent the second opening in the container to disperse hot exhaust gases,
- has perforations symmetrically spaced on the top and bottom of the diffuser to circulate the heat evenly, creating a uniform bend,
- c. extends the entire length of the inner housing.

(Currently Amended) 3. Apparatus as claimed in 2 wherein the diffuser has at least one opening therein adjacent the pipe, to distribute extract gases to heat the pipe uses a source of hot exhaust gases from a motor vehicle, allowing small and large schedule pipe to be bent.

- (Currently Amended) 4. The apparatus as claimed in 3 has interchangeable parts, but no moving parts.
- (Currently Amended) 5. The apparatus of claim one allows various scheduled pipe to be bent, without having to allow the complete apparatus to reach a lower temperature.
- (Currently Amended) 6. Templates as claimed in 1 allow multiple bends to be made more rapidly.

(Currently Amended) 7. (Canceled)

(Currently Amended) 8. (Canceled)

# SUBSTITUTE SPECIFICATION DESCRIPTION

#### BACKGROUND OF THE INVENTION

The invention relates to an apparatus for heating plastic pipes so they may be bent.

More particularly, the invention relates to an apparatus that may be conveniently used in fieldwork to heat PVC plastic pipes, so that they may be bent and fitted on site.

It is known in the art to heat plastic pipe by enclosing it in a box and subjecting it to infrared energy supplied by electrical heaters. In addition, method and apparatus for bending tubes by applying heat to them are disclosed in U. S. Patent No. 3,965,715 to Parmann, U. S. Patent No. 2,571,416 to Brown, and U. S. Patent No. 2,480,774 to Rossheim, et al. The disadvantages of the prior art are that they may be inconvenient for use in the field or at some remote site where a source of electricity or other means for heating the pipe in unavailable.

U.S. Patent No. 6,033,213, issued on March 7, 2003, to Halverson, Jr. relates to an apparatus for bending plastic pipe, with a diffuser that is removable and interchangeable with an additional diffuser if needed for heating different schedule pipe. This apparatus is not insulated. The disadvantage of the interchangeable diffusers is that it not only takes additional time to allow the apparatus to cool down for those in the field to change the diffusers, it requires extra space for carrying and storage. As this apparatus is not insulated, it will take additional time for field personnel to handle the unit for extra bends and storage. In addition, this apparatus has one size inlet in which the pipe is to be placed. This can permit either too much or too little of the gases to escape. An increased amount of heat escaping defeats the purpose of the apparatus, by not minimizing the gas flow and decrease the heat retained, resulting in an ineffective or incomplete bend. A decrease in allowance of the gases escaping will result in the build up of internal pressure, resulting in enough pressure to blow back into the heat source, possibly damaging the heat source.

U.S. Patent No. 6,257,880, issued on July 10, 2001, to Hirayama describes an apparatus made of galvanized steel, on wheels or rollers, with an internal burner.

utilizing a heat source or propane gas. The present invention is distinguishable from this apparatus in that there is no need for an internal burner, which may easily break upon usage in the field. The present invention provides the capabilities of the use of a number of heat sources, although the object of the invention is to utilize the convenient use of the exhaust of a motor vehicle. The present invention allows for faster installation, permitting faster bends and less equipment to be taken out on the field. As in the previous U.S. Patent No. 6,033,213 this apparatus has but one size inlet for the pipe, allowing too much or too little gas/heat to escape. It is also noted that present invention is made of aluminum and lightweight and, alleviating the need for rollers or wheels.

U.S. Patent No. 6,561,797, issued on May 13, 2003 to Johnson describes and apparatus for heating rigid plastic pipe with a gas burner. The present invention allows thin walled and thick walled plastic pipe to be manipulated. Having an internal gas burner this apparatus may break or malfunction with usage in the field. The present invention permitting various heat sources.

# SUMMARY OF THE INVENTION

According to the present invention, a container or box is provided having openings in the ends to enclose a plastic pipe disposed through the box. A conduit is attached to the box and has an end adapted to connect to the exhaust pipe of a motor directed upon the pipe at the desired point to be bent. When the pipe is sufficiently heated, it will sag, it is then withdrawn from the box and bent in the usual and well-known manner.

The principal object of the invention is to supply the worker in the field with a durable, lightweight, self contained, portable source for bending thin walled and thick walled pipe.

It is also the object of the invention to supply a heat source that requires no electricity or propellants, that will heat up quickly, maintaining a proper temperature, and be able to be handled immediately after or during use, with the ability to cool down quickly for convenient storage.

### BRIEF DESCRIPTION OF THE DRAWINGS

- Fig. 1 is a top perspective view of the apparatus of the invention.
- Fig. 2 is perspective view of the conduit fitting.
- Fig. 3 is an internal top sectional view of the apparatus of the invention, and
- Fig. 4 is an internal end sectional view of the apparatus of the invention.

## DETAILED DESCRIPTION OF THE EMBODIMENT

Referring now to Fig. 1, the apparatus of the invention is indicated generally at 1. An elongate container or box 2, with handle 3, is provided for surrounding the section of PVC pipe to be bent. The container preferably includes openings 4 formed through the ends 5 of the box, the openings being sized to permit positioning the pipe to be heated through the container 2, by use of templates 7. The lid 6 permits containment of hot exhaust gases in the container 2. A fitting 8, which may be any configuration although an elbow fitting is illustrated here, is provided mounted through an opening 9 in a side 10 of the container.

Referring now to Fig. 2, a flexible conduit 11 is connected to the fitting by any suitable means and has its opposite end adapted to engage the exhaust pipe 12 of motor vehicle 13. The various means of connection will be dependent upon the size of the motor vehicle's exhaust pipe 12.

Referring now to Fig. 3, in the preferred embodiment, a diffuser 14 is mounted in the internal container 19 and may consist of a longitudinally extended U shaped sheet of metal attached to the internal container 19 by welding or other practical means such as screws 15. The diffuser 14 is located so that the exhaust gases exiting from the through-fitting 8 impinge upon the diffuser plate and not directly upon the pipe to be bent. Spot heating of the pipe is therefore prevented and the hot gases are dispersed and caused to flow around the pipe for more uniform heating. Depending upon the type and thickness of the pipe to be bent, the diffuser may vary in length or construction and may include openings 16 there through, all of which is considered a part of the present


invention. Insulation 18 permits internal retention of heat, deterring outside heating of outer container 2.


Referring now to Fig. 4, in the preferred embodiment, a diffuser 14 is mounted in the internal container 19. This may consist of a longitudinally extended U shaped sheet of metal attached to the internal container 19 by welding or other practical means such as screws 15. The diffuser 14 is located so that exhaust gases impinge upon the diffuser plate and not directly upon the pipe to be bent. Spot heating of the pipe is prevented and hot gases are dispersed around the pipe for uniform heating. Insulation 18 permits internal retention of heat, deterring outside heating of container 2.

Referring now to Fig, 5, templates 7 with various sized openings 20, 21, 22, are provided to maintain internal conditions within the apparatus. The template used will be dependent upon the schedule of pipe to be bent. The appropriate template are slid into the distal ends of the container 2, between the side 5 and the inner box 19. Templates are utilized to control gas flow from the container, maintaining the proper temperature and internal pressure.

In the use of the invention, a pipe to be bent is placed in the container and positioned so that the centerline of the portion of the pipe where the bend is to be made is positioned opposite the fitting 8. The end 17 of the flexible conduit is then slipped over the exhaust pipe 12 of the motor vehicle and the motor vehicle's engine is started. The hot exhaust gases flow through the conduit and the fitting and strike the diffuser in the box where they are dispersed to surround the pipe through perforations 16. When the pipe is sufficiently heated to be bent, which condition may be determined by the pipe becoming limp and starting to sag, or grasping an end of the pipe and moving it to determine the softness of the section in the container, the pipe is slid horizontally out of either distal end of the apparatus. Whereupon it may be bent by hand or by the use of jigs, or other means such as are known in the art. Upon cooling, the pipe will retain the bent configuration and it may be carried to the jobsite for connection in other plumbing/electrical conduit bodies.



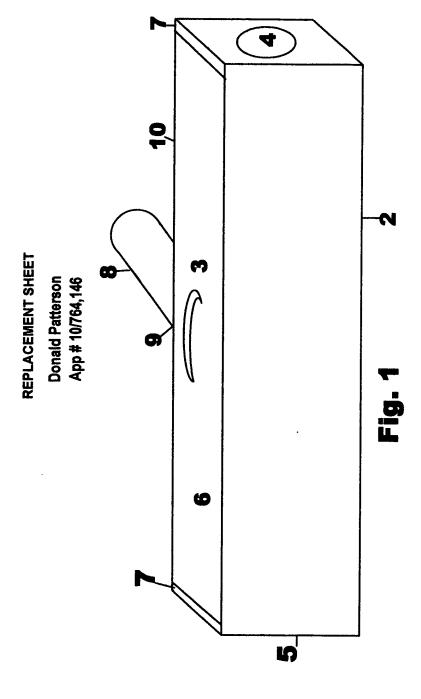

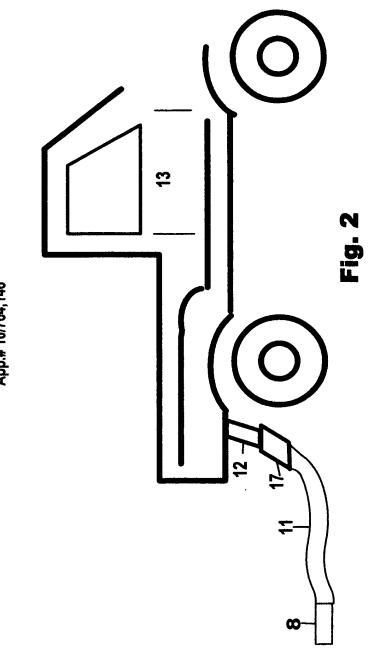

REPLACEMENT SHEET
Donald Patterson
App.# 10/764,146

REPLACEMENT SHEET

Donald Patterson App.# 10/764,146

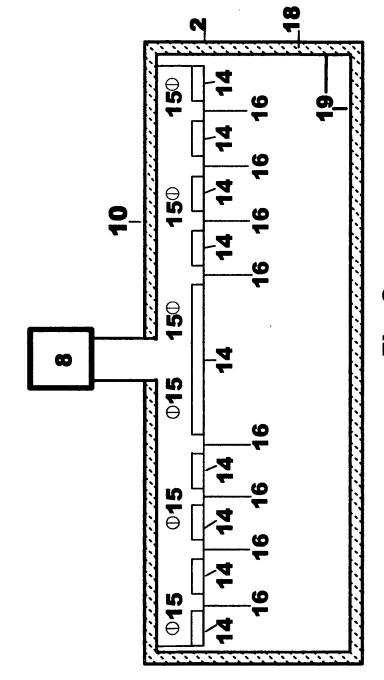


Fig. 3

4 4

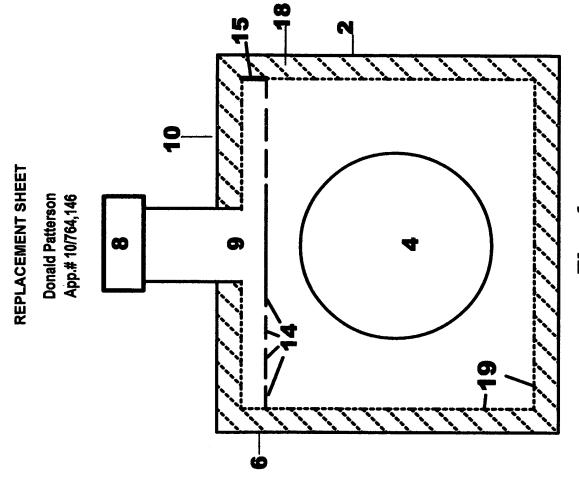


Fig. 4

REPLACEMENT SHEET
Donald Patterson
App.# 10/764,146

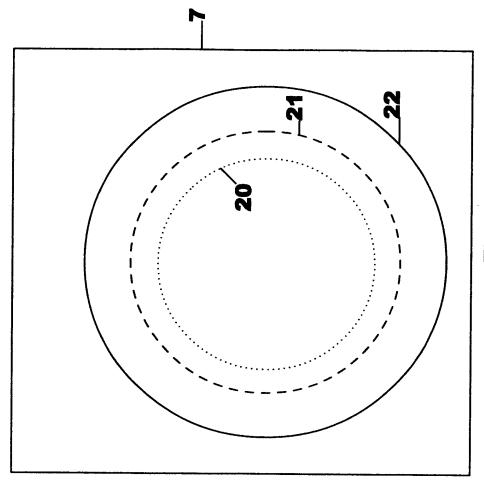


Fig.5